

SitaCarport

Safe drainage with a clean appearance.



- + The perfect solution for carports
- + With connection sleeve of choice
- + Connection to rain downpipe to DIN EN 612, 6-piece
- + Available with zinc or copper facing cover



SitaCarport

SitaCarport

Product features at a glance:

Product features


Applications	For draining the rainwater from carports
Material	Polyurethane
Design	vertical
Temperature resistance, min.	-20 °C
Temperature resistance, max.	80 °C
Material class	Euroclass E / B2 normal flammability
Properties	+ Not sensitive to the weather (UV/IR radiation, rain/snow, temperature, ozone, etc.) + Impact and shock resistant + Durable
Workmanship	The general rules of engineering as well as the installation examples and installation instructions of Sita Bauelemente GmbH form the basis. The installation examples are for illustration purposes only and are a general, non-binding recommendation. The design is shown in schematic form only and does not replace the necessary work, detail and installation planning by the contractor. The customer, planner, contractor, etc. is responsible for checking the suitability, completeness and dimensions for the project and adjusting or tailoring the components to suit local requirements. Neighbouring works are shown in schematic form with no guarantee of their being complete or correct. The technical specifications in the information sheets, workmanship guidelines and system permits must be adhered to.



Tender text


SitaCarport carport outlet, made of polyurethane, thermally insulated, drainage capacity 4.0 l/s at 35 mm retaining height with large foamed-in connection sleeve of choice (495 mm x 495 mm) for homogeneous connection of the roofing membrane, with securing ring for additional securing of the connection sleeve and to hold the dome grate, with dome grate and copper or zinc standpipe cap for connection to a rain downpipe to DIN EN 612, 6-piece, supply and install to professional standards.

Technical drawing

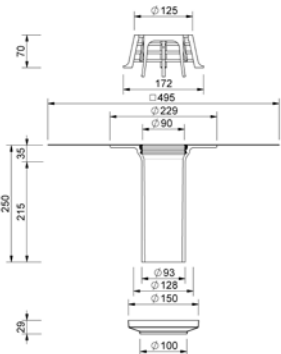

DN	Opening/Core borehole (mm)	Execution	Article number
95	128	With copper closure cap	29 29 xx
		With zinc closure cap	29 28 xx

xx = Article end numbers for connection sleeve of choice

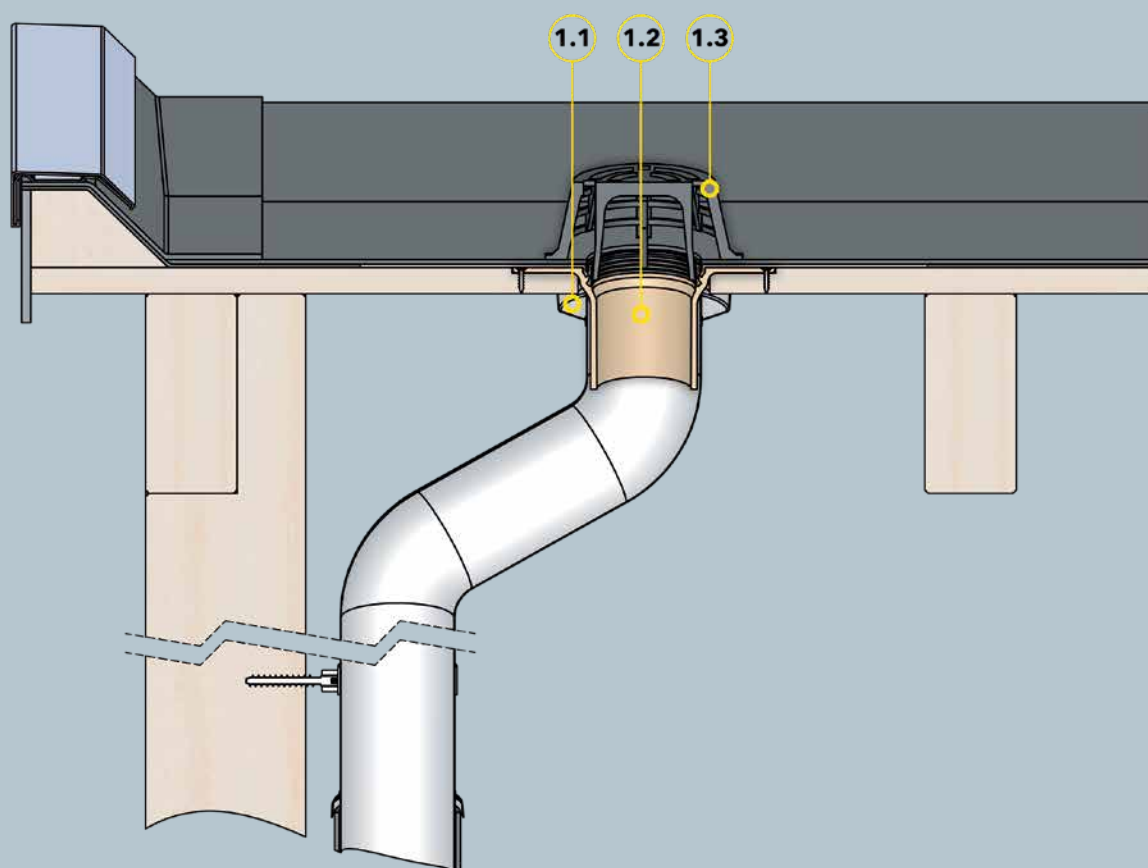

Components

SitaCarport consisting of:

- 1.1** Facing cover
- 1.2** Base body
- 1.3** Dome grate

Roof structure

Ventilated roof structure to the general rules of engineering with:

- + Sealing
- + Formwork
- + Supporting structure